

120_{Kg}
Weight

2.500_L
Capacity

625_{Kg}
Load

1.070_{mm}
Height of opening

1870 x 1180 x 1830
mm
Maximum Dimen-
sions

205, 250 mm
Diameter of opening



FEATURES

Rotationally moulded from a single piece of solid-coloured high density linear polyethylene and stabilised against the combined effects of UV radiation and water, it is highly resistant to atmospheric conditions.

Designed to perfectly fit into the urban environment.




Smooth surfaces.

Colour stability.

Total corrosion resistance.

The containers are designed with clearly marked waste apertures and instructions on how to use them.

STANDARDS

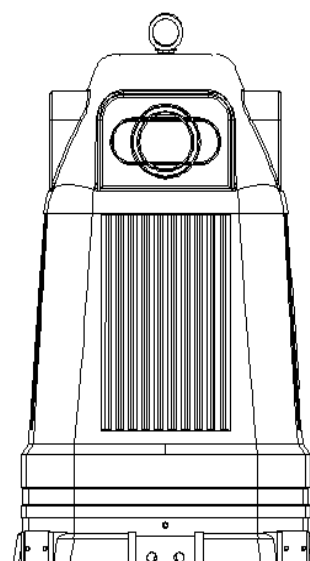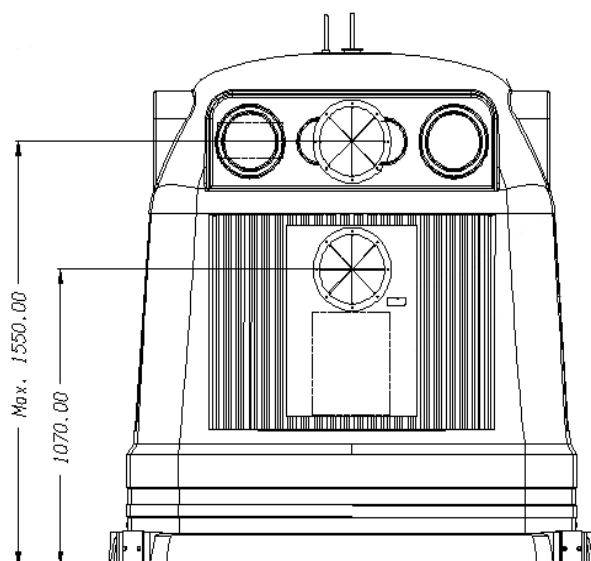


ATTRIBUTES



QUALITY



ACCESSIBILITY



FUNCTIONALITY



EQUIPMENT


Diagrams and text indicating the type of waste.

Pictogram based on the PICOL system (Pictorial Communication Language).


Accessible openings at height of 1070 mm. from the ground. Standar openings at height of 1400 mm.

Discharge doors manufactured from rotationally moulded high density polyethylene.

The lifting system is corrosion resistant steel and is located on the upper part of the container.



Braille labelling



Circular openings




Accessible openings



Kinshofer



Double hook



Easy emptying